


Corat-1701 / Corat-1716



- Easy installation
- compact and ergonomically
- PS/2 Connector on the front side to connect an external Mouse



1U 17" LCD-Monitor Keyboard-Drawer with Dual-Rail Slides and 16 Port CAT5 KVM-Switch (Corat-1716) optionally

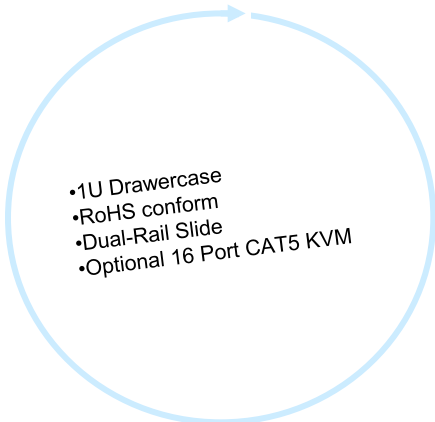

- 1U Drawercase
- RoHS conform
- Dual-Rail Slide
- Optional 16 Port CAT5 KVM

Features:

- Dual-Rail sliding console for any 1U (19") system rack
- Flexible External Mouse
- Monitor and Keyboard worked separately
- RGB analog LCD-Display up to 1280x1024 with 300cd/m² brightness
- Supports Microsoft Intellimouse, Logitech FirstMouse+, MouseMan+, and others
- Supports Windows , NetWare , Linux and Free BSD

Specifications:

Casing:

- Heavy-duty Steel
- Casecolor RAL 9005
- Dual-Rail design has LCD-Display and Keyboard worked separately
- Adjustable Rack-Slides for convenient positioning of the unit when in use
- 106 Key PS/2 Keyboard with Touchpad
- Monitor open angle 0° - 105°
- Standardconnection Corat-1701: HDDB-15 to 1xVGA and 2xPS/2 (KAB-102E) optionally to 1xVGA and 1xUSB (KAB-102U)
- Standardconnection Corat-1716: 16xRJ-45 für Dongle-USB / Dongle PS/2
- Keyboard Layouts: german, us-english, french, italian and spanish (further Layouts on request)



Corat-1701



Corat-1716



Technical Specification LCD Monitor

Display Size:	17"
Resolution:	Maximum 1280x1024
Number of colors:	16,2 M.
Optical frequenz:	H: 30KHz – 70KHz V: 55KHz – 75KHz
Viewing angle:	H: 140° / V: 130°
Bandwidth:	80MHz
Brightness:	300 cd/m ²
Contrast Ratio:	700:1
Response time:	8ms
Pixel pitch:	0,264mm(H) x 0,264mm(V)
Backlights:	4xCCFL
Power Supply:	Input: 100V – 240V AC, 48Hz – 62Hz Output: DC 12V, 4,0A

Technical Specification CAT5 KVM-Switch (Corat-1716)

Computer connections:	16 Direct
Daisy-Chain:	256 max. (in connection with KVM-116CA)
Port selection:	OSD / Hot Key / Push Buttons
Connectors on the backside:	16 x RJ45 (embedded), Daisy-Chain IN/OUT, Flash-Port
Resolution:	Max. 1280x1024
Flash upgrade port:	Firmware upgradeable Via Mini DIN 6 Pin console Mouse Port
Adapter Available Distance:	30m (in connection with PS/2 or USB Dongles optional available)
Power Supply:	DC 12V, 4,0A
Support:	Standard PS/2 Connectors for PC, USB Connectors for PC, SUN and MAC

Dimension and Weight

Corat-1701	Unpacked:	590x 476x 44,mm (W x L x H)	14,1 kg
Corat-1716	Unpacked:	590 x 476 x 44 mm (W x L x H)	15,0 kg